
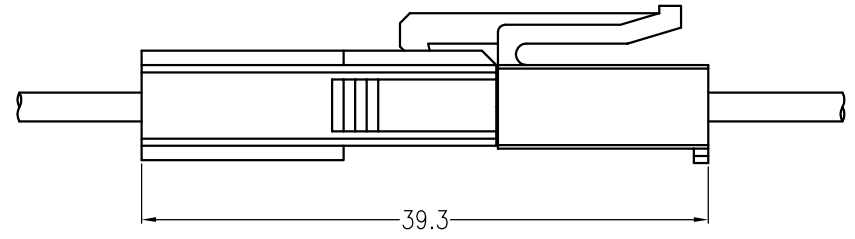
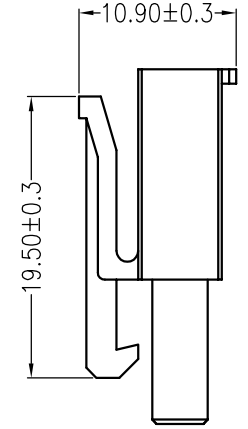





REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		NEW RELEASE	蒋建银	2018.01.23

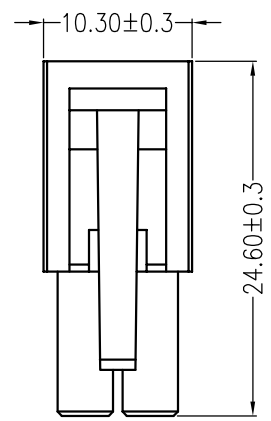

主要技术参数 Main Specifications

线数 (Poles): 02 to 08
 额定电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 300 V AC DC
 额定电流 (Rated current): 10A AC DC
 耐电压 (Withstand Voltage): 1500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

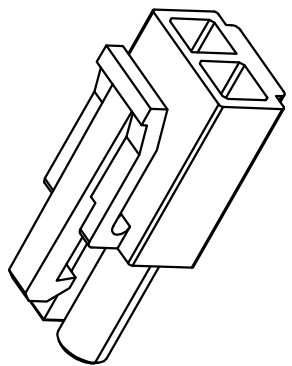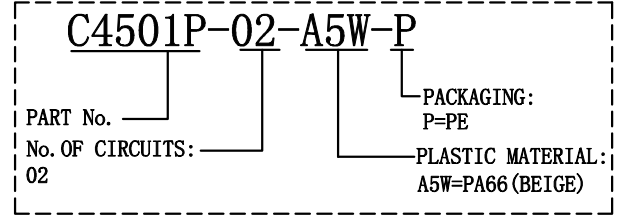

C				
B				
A	HOUSING	1 PCS	PA66	COLOR:(BEIGE) UL94-V2
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.			TITLE: C4501P 4.0mm PITCH HOUSING	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'		C4501P-02-A5W-P	
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:	
--	--	CHKD: 田峰	JKUN-GCCP-0614	
⊕	UNITS: mm	DR: 蒋建银	SCALE	SHEET
			1 : 1	1 / 1