


REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	蒋建银	2018.07.17

Circuits	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

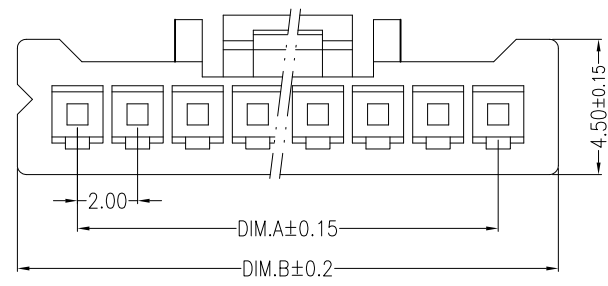



主要技术参数 Main Specifications

线 数 (Poles): 02 to 15
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 3.0A AC DC
 耐 电 压 (Withstand Voltage): 1000V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

A2008Y--A5W-P-3**

PART No. 6No. OF CIRCUITS: 02~15	SPECIAL CODE: 3 PACKAGING: P=PE PLASTIC MATERIAL: A5W=PA66 (WHITE)
--	--

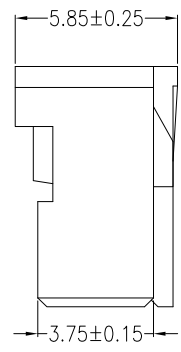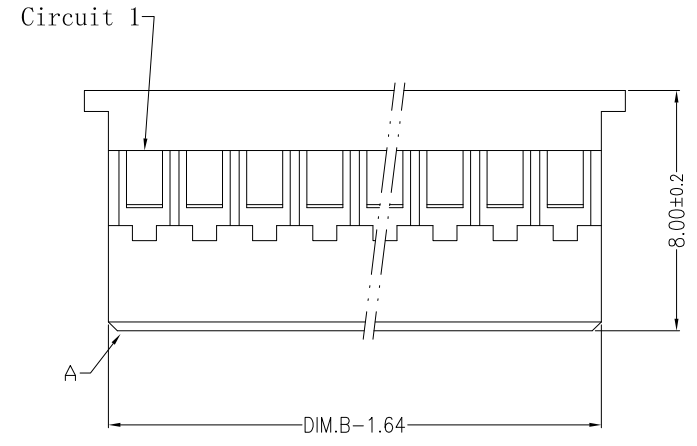

C				
B				
A	PEDESTAL	1 PCS	PA66	COLOR:WHITE
ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO., LTD.				TITLE: A2008Y-**-03P 2.0mmPITCH Housing
X.±0.5	X.±5'	USE:	CUSTOMER	
.X±0.3	.X±2'			
.XX±0.25	.XX±1'	APPD:	PART NO.: A2008Y-**-A5W-P-3	
--	--	邵敬和		
⊕	∠	CHKD:	DWG NO.: JKUN/GCCP-0754	
		田 峰		
	UNITS: mm	DR:	SCALE 1 : 1	
		蒋建银		