

A

B






C

D

E

F

REV	DESIGN	DATE
A0	-	-
-	-	-

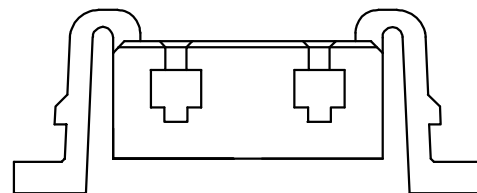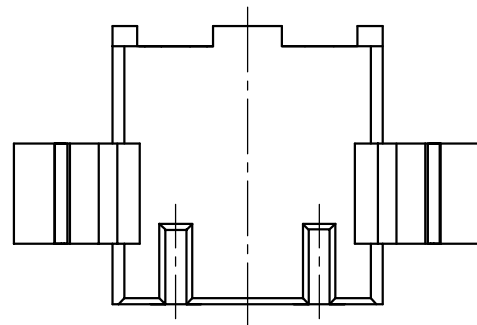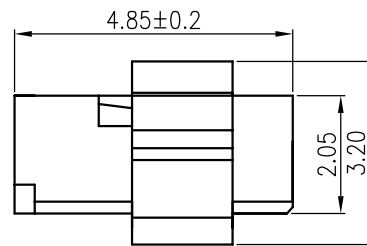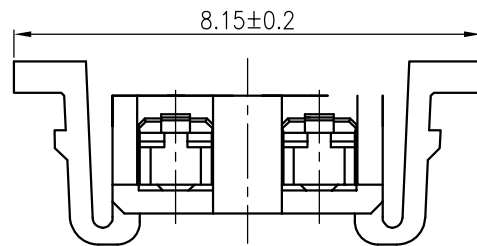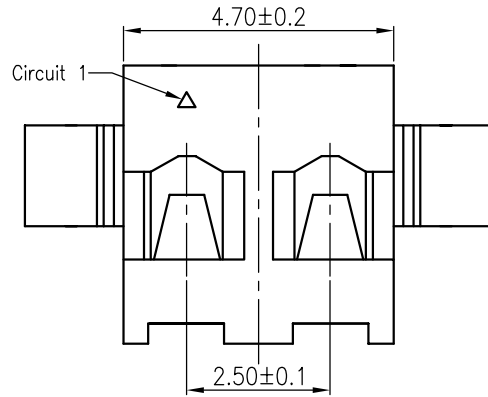

## 主要技术参数 Main Specifications

线 数 (Poles): 02

接触电阻 (Contact resistance):  $\leq 20\text{m}\Omega$

绝缘电阻 (Insulation resistance):  $\geq 1000\text{M}\Omega$

额定电压 (Rated voltage): 250V AC DC

额定电流 (Rated current): 2.0A AC DC

耐 电压 (Withstand Voltage): 1000V AC/minute

温度范围 (Temperature Range) :  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

ORDER INFORMATION:

**A2503Y-02-A5W-P**

PART No.

No. OF CIRCUITS:  
02

PACKAGING:

P=PE

PLASTIC MATERIAL:

A5W=PA66 (WHITE)

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B				
A	HOUSING	1 PCS	PA66	UL 94V-0, COLOR:White

**JKUN 温州健坤接插件有限公司**  
WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE: -

-

X.±0.5

X.±5'

USE:

CUSTOMER

PART NO.:

A2503Y-02-A5W-P

.X±0.3

.X±2'

APPD:

邵敬和

DWG NO.:

JKUN-GCCP-0794

.XX±0.25


.XX±1'

CHKD:

田峰

SCALE

SHEET



UNITS:  
mm

DR:

蒋建银

1 : 1

1 / 1

A

B

C

D

E

F