




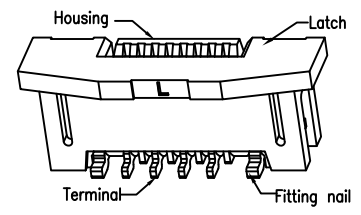


REV	DESCRIPTION	DESIGN	DATE
A	NEW RELEASE	Ryan	2021/03/18

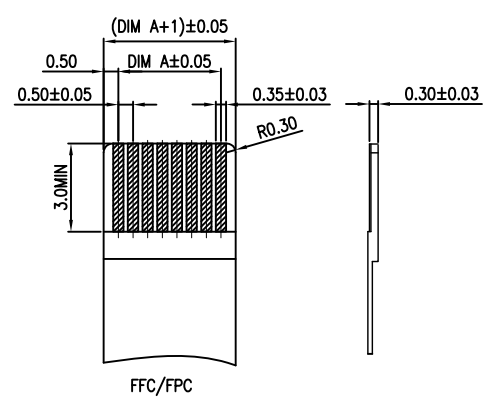


CKT	DIM A	DIM B	DIM C	CKT	DIM A	DIM B	DIM C
4	1.50	2.70	8.30	33	16.00	17.20	22.80
5	2.00	3.20	8.80	34	16.50	17.70	23.30
6	2.50	3.70	9.30	35	17.00	18.20	23.80
7	3.00	4.20	9.80	36	17.50	18.70	24.30
8	3.50	4.70	10.30	37	18.00	19.20	24.80
9	4.00	5.20	10.80	38	18.50	19.70	25.30
10	4.50	5.70	11.30	39	19.00	20.20	25.80
11	5.00	6.20	11.80	40	19.50	20.70	26.30
12	5.50	6.70	12.30	41	20.00	21.20	26.80
13	6.00	7.20	12.80	42	20.50	21.70	27.30
14	6.50	7.70	13.30	43	21.00	22.20	27.80
15	7.00	8.20	13.80	44	21.50	22.70	28.30
16	7.50	8.70	14.30	45	22.00	23.20	28.80
17	8.00	9.20	14.80	46	22.50	23.70	29.30
18	8.50	9.70	15.30	47	23.00	24.20	29.80
19	9.00	10.20	15.80	48	23.50	24.70	30.30
20	9.50	10.70	16.30	49	24.00	25.20	30.80
21	10.00	11.20	16.80	50	24.50	25.70	31.30
22	10.50	11.70	17.30	51	25.00	26.20	31.80
23	11.00	12.20	17.80	52	25.50	26.70	32.30
24	11.50	12.70	18.30	53	26.00	27.20	32.80
25	12.00	13.20	18.80	54	26.50	27.70	33.30
26	12.50	13.70	19.30	55	27.00	28.20	33.80
27	13.00	14.20	19.80	56	27.50	28.70	34.30
28	13.50	14.70	20.30	57	28.00	29.20	34.80
29	14.00	15.20	20.80	58	28.50	29.70	35.30
30	14.50	15.70	21.30	59	29.00	30.20	35.80
31	15.00	16.20	21.80	60	29.50	30.70	36.30
32	15.50	16.70	22.30				



Specifications:
 Housing: High temperature plastic UL94V-0; Color: natural
 Latch: High temperature plastic UL94V-0; Color: black
 Terminal: Copper alloy, Matte Tin/Gold
 Fitting Nail: Copper alloy, Matte Tin
 Product must comply HF RoHS specification.
 Contact resistance: ≤30mΩ
 Insulation resistance: ≥100MΩ
 Rated voltage: 50V AC/DC
 Rated current: 0.5A AC/DC
 Withstand Voltage: 250V AC/minute
 Temperature Range: -25°C~+85°C

ORDER INFORMATION:

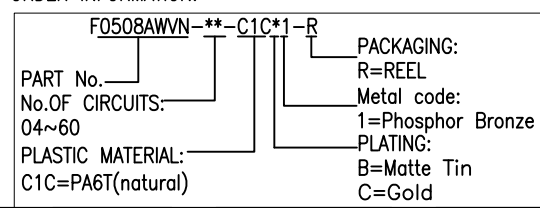

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO.,LTD.

TITLE: FPC Pitch0.5 H3.9 ZIF CONN. SMT Normal Type

GENERAL TOLERANCE	USE:	PART NO.:
X.X ±0.15	CUSTOMER	F0508AWVN-**-C1C*1-R
X.XX ±0.10	APPD: Shaojinghe	DWG NO.:
X.XXX ±0.05	CHKD: Shaojinghe	JKUN/GCKH-0907
UNITS: mm	DR: Ryan	SCALE: 1:1
		SHEET: 1/1